



#2- PUSH LATCH ASSY OUT
OF THE BOTTOM OF THE
FOREND WOOD, (PUSH WRENCH THRU
EMPTY SCREW HOLES, ALTERNATING LEFT-
RIGHT TO PUSH LATCH ASSY SQUARELY
OUT THE BOTTOM OF THE FOREND WOOD)



*METHOD OF REMOVING/
REPLACING A LATCH LEAF
SPRING FROM A KOLAR GUN*

#4- REMOVE
SPRING & RE-ASSEMBLE
THE NEW ONE

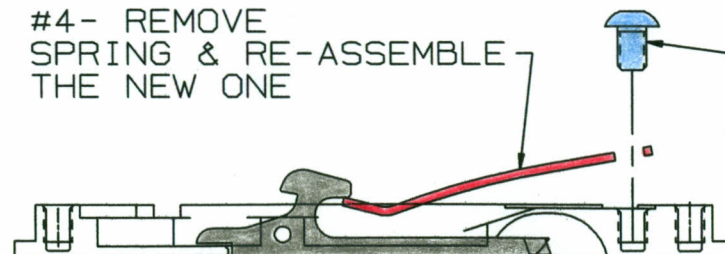

#3- REMOVE LATCH SPRING
RETAINING SCREW

#5 - PLACE THIS ALL BACK TOGETHER & NOW SOMEONE
OWES YOU A BEER (THATS HOW IT WORKS IN WISCONSIN)
TAKE CARE!