


#1 REMOVE WOOD SCREWS,  
NOTE: USE A SCREWDRIVER  
THAT FITS THE PHILLIPS  
DRIVE WELL, ONE DOES NOT  
WANT TO BURR UP THE SCREW  
HEAD, THIS CANNOT SIT  
POSITIVE OF THE FOREND  
ROLL SURFACE WHEN THEY  
ARE RE-ASSEMBLED

METHOD OF REMOVING/  
REPLACING A FOREND  
SHOE ON A KOLAR GUN

#2-REMOVE LATCH  
SCREWS (2)

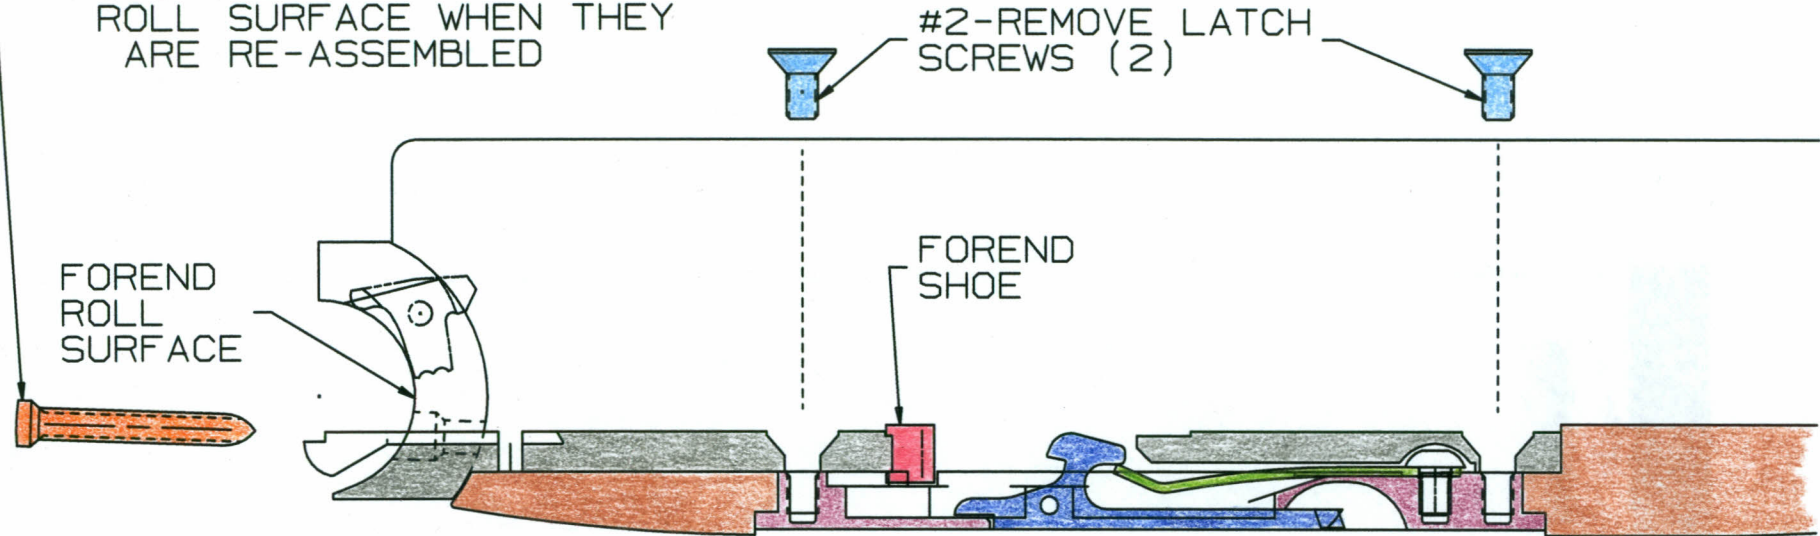

#3- PUSH LATCH ASSY OUT  
OF THE BOTTOM OF THE  
FOREND WOOD, (PUSH WRENCH THRU  
EMPTY SCREW HOLES, ALTERNATING LEFT-  
RIGHT TO PUSH LATCH ASSY SQUARELY  
OUT THE BOTTOM OF THE FOREND WOOD)



#4 - REMOVE FOREND IRON FROM FOREND WOOD  
CAN PUSH UP THRU LATCH BODY OPENING  
(IF TIGHT IN THE BACK), SHOULD REMOVE EASILY  
--TO PAGE 2--

PAGE 1 OF 2  
DRWG:SHOE  
COPIED:CUST  
KJS, 6-11-2013